





FLP-5001BPM

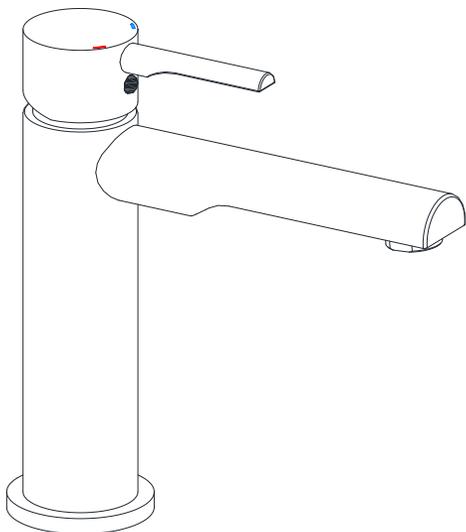

TECHNICAL DRAWING

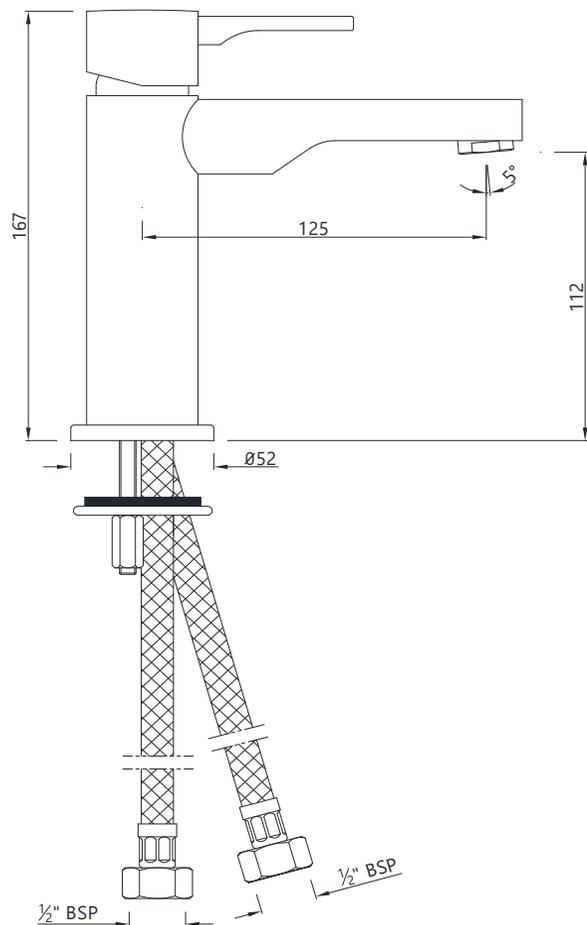

TEMP. & WATER PRESSURE REQUIREMENTS




Working Pressure: 1~3 bar




Required Temperature: 5-65°C


Note: Above are the recommended values for getting Conventional Output.


DO ✓

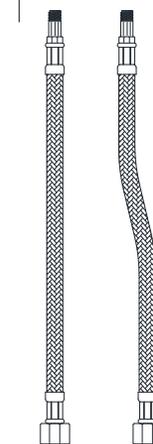


DON'T ✗

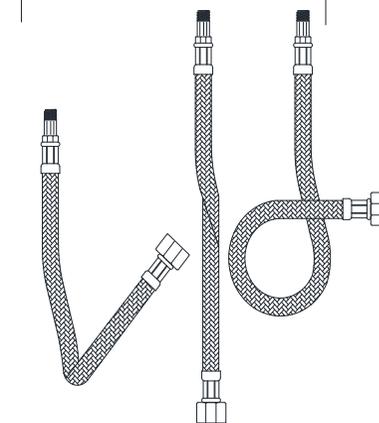

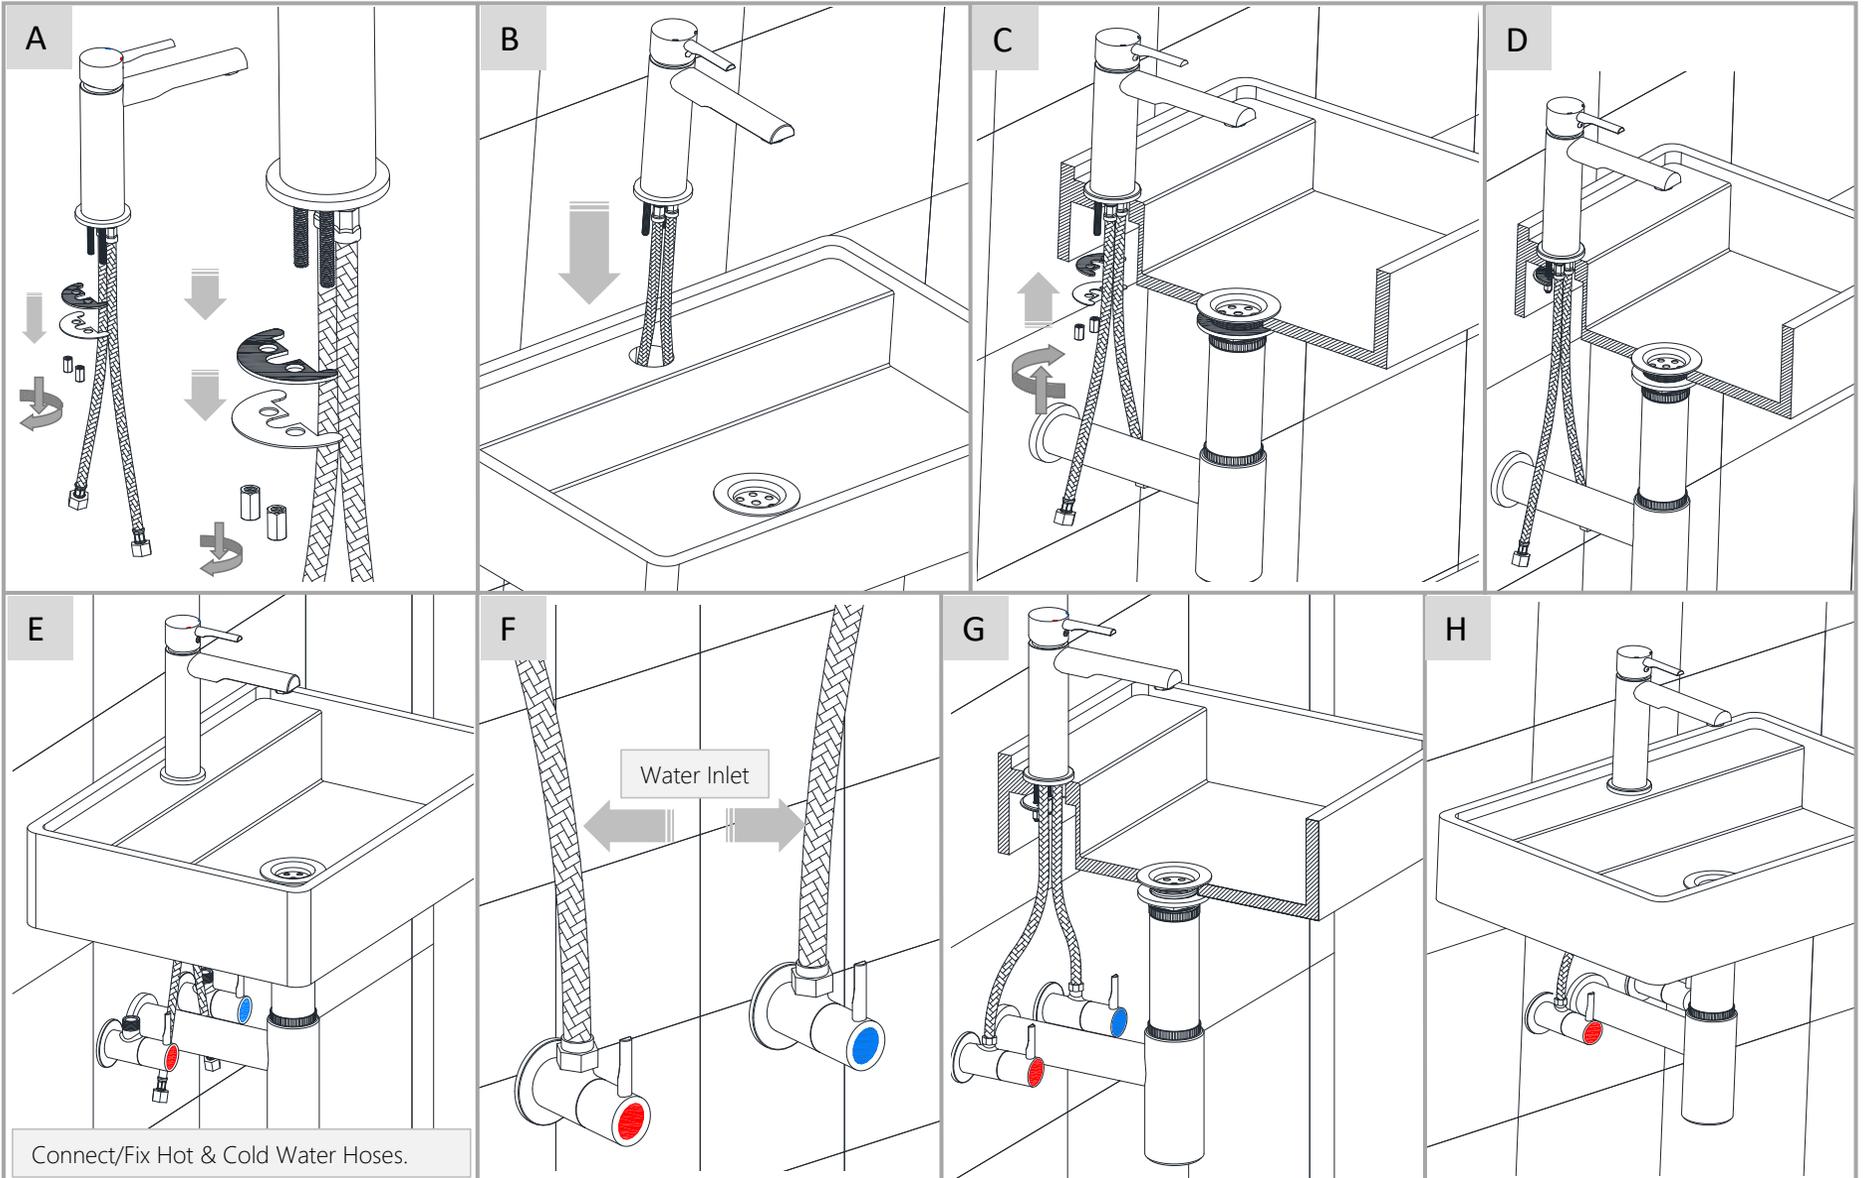


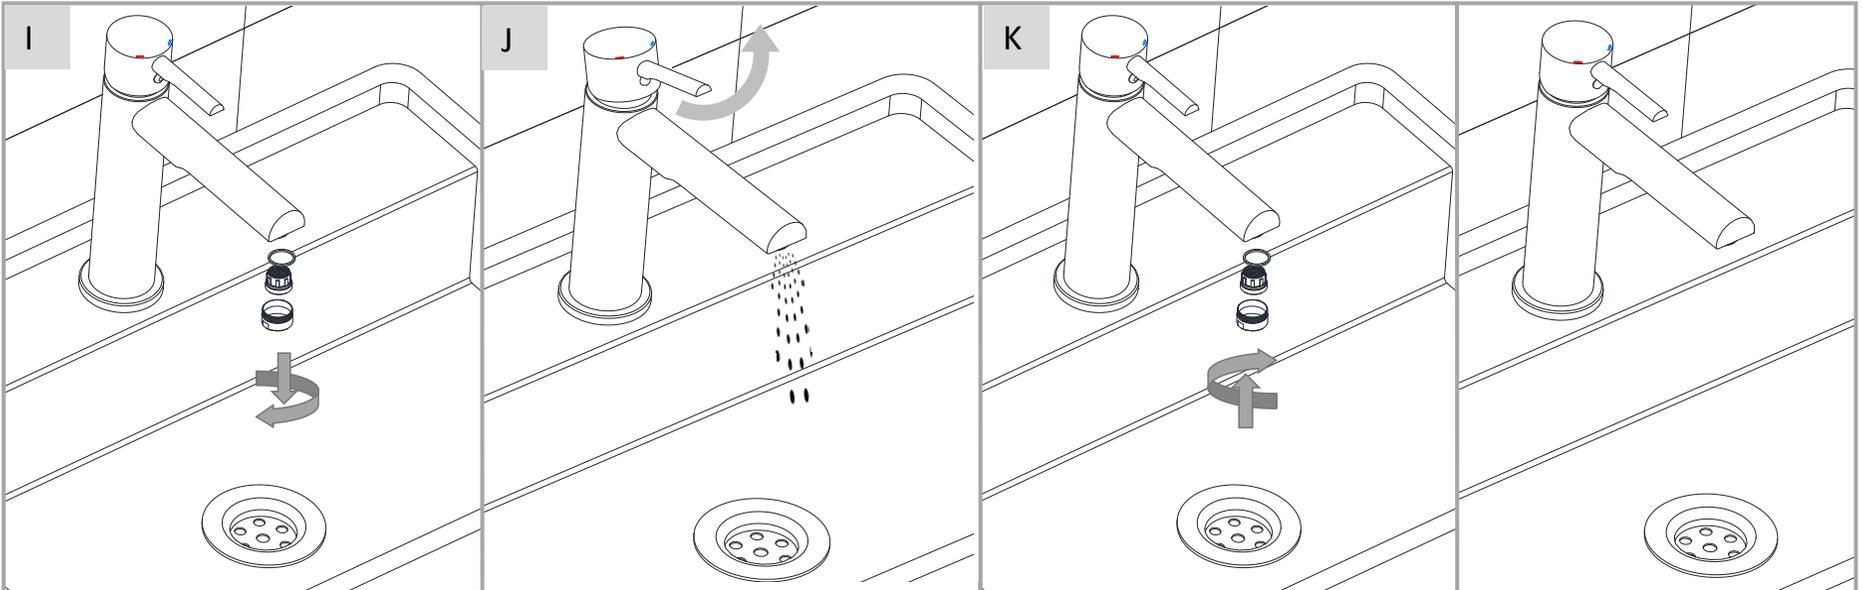


HOW TO OPERATE


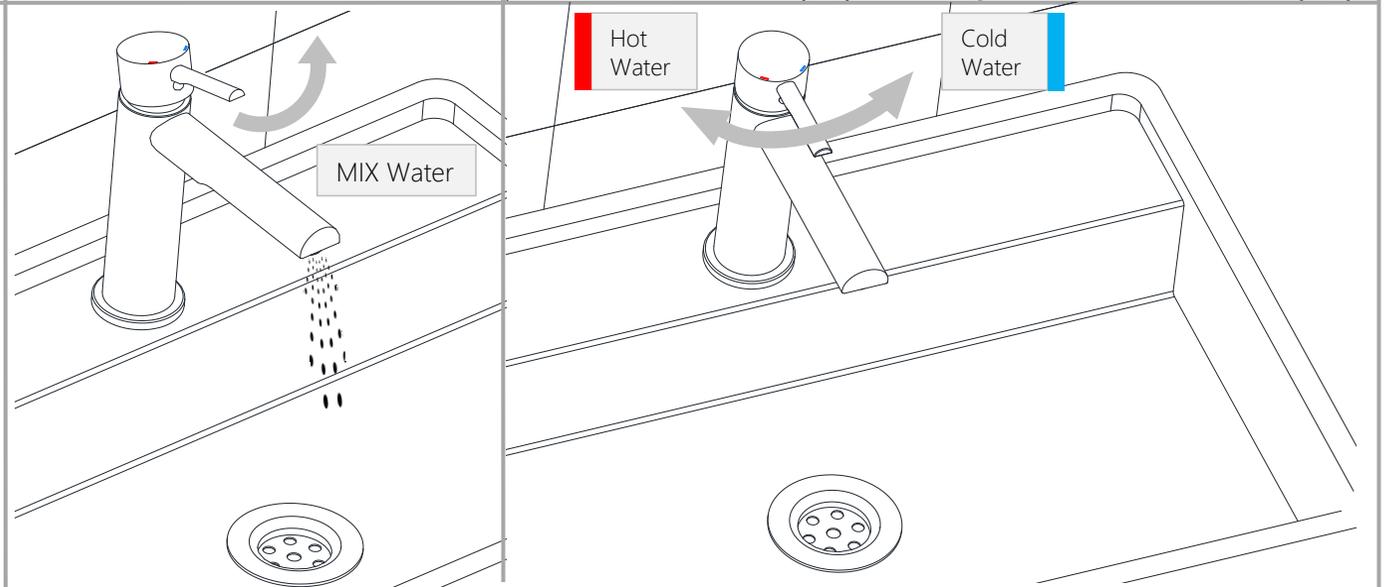





Apply soft cotton cloth

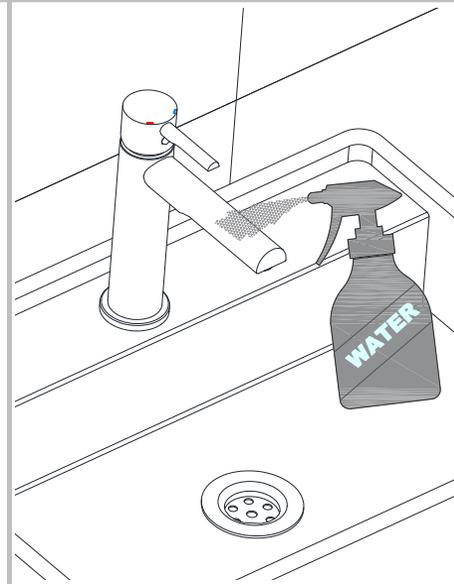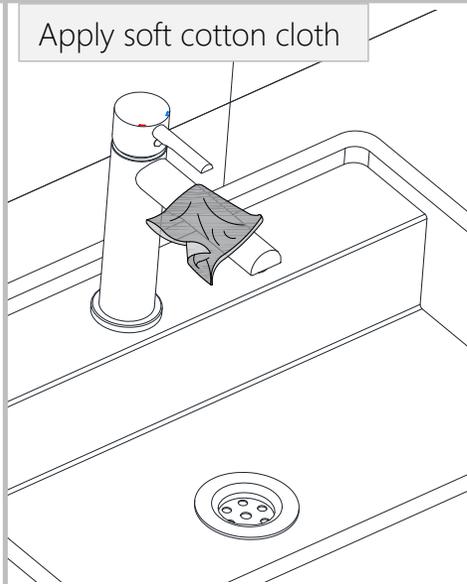

Apply soft cotton cloth

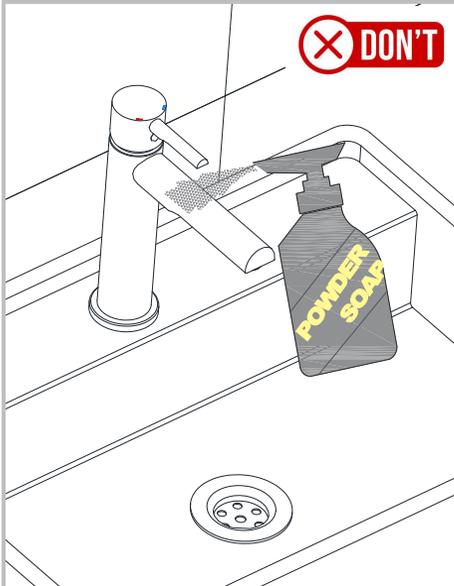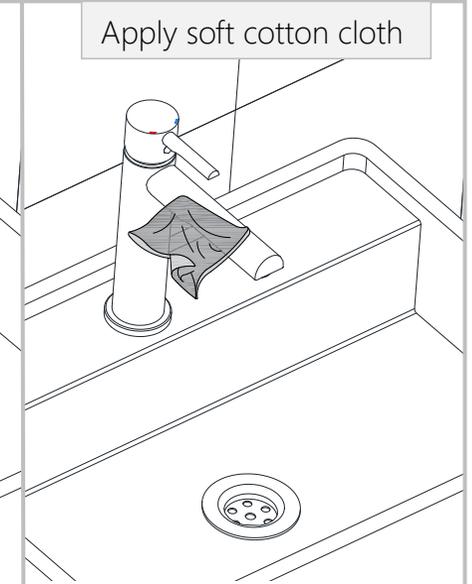

Don't apply Scrub

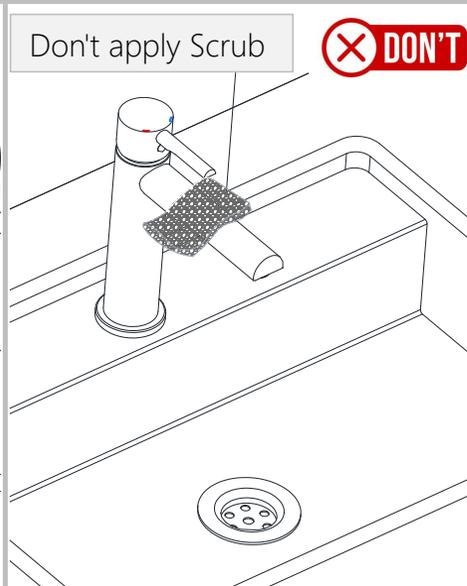

Steps & Cleaning agents requirements for Aerator Cleaning.

