






Exposed Part Kit of Single Lever Basin Mixer Wall Mounted

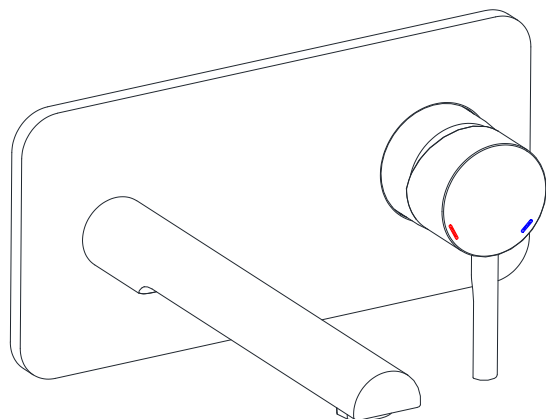


* Representative image

Temp & water pressure Requirement.


	Working Pressure: 1~3 bar
	Required Temperature: 5-65°C

- **Working Pressure:-**The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL EXPOSED PART KIT SINGLE LEVER BASIN MIXER WALL MOUNTED.







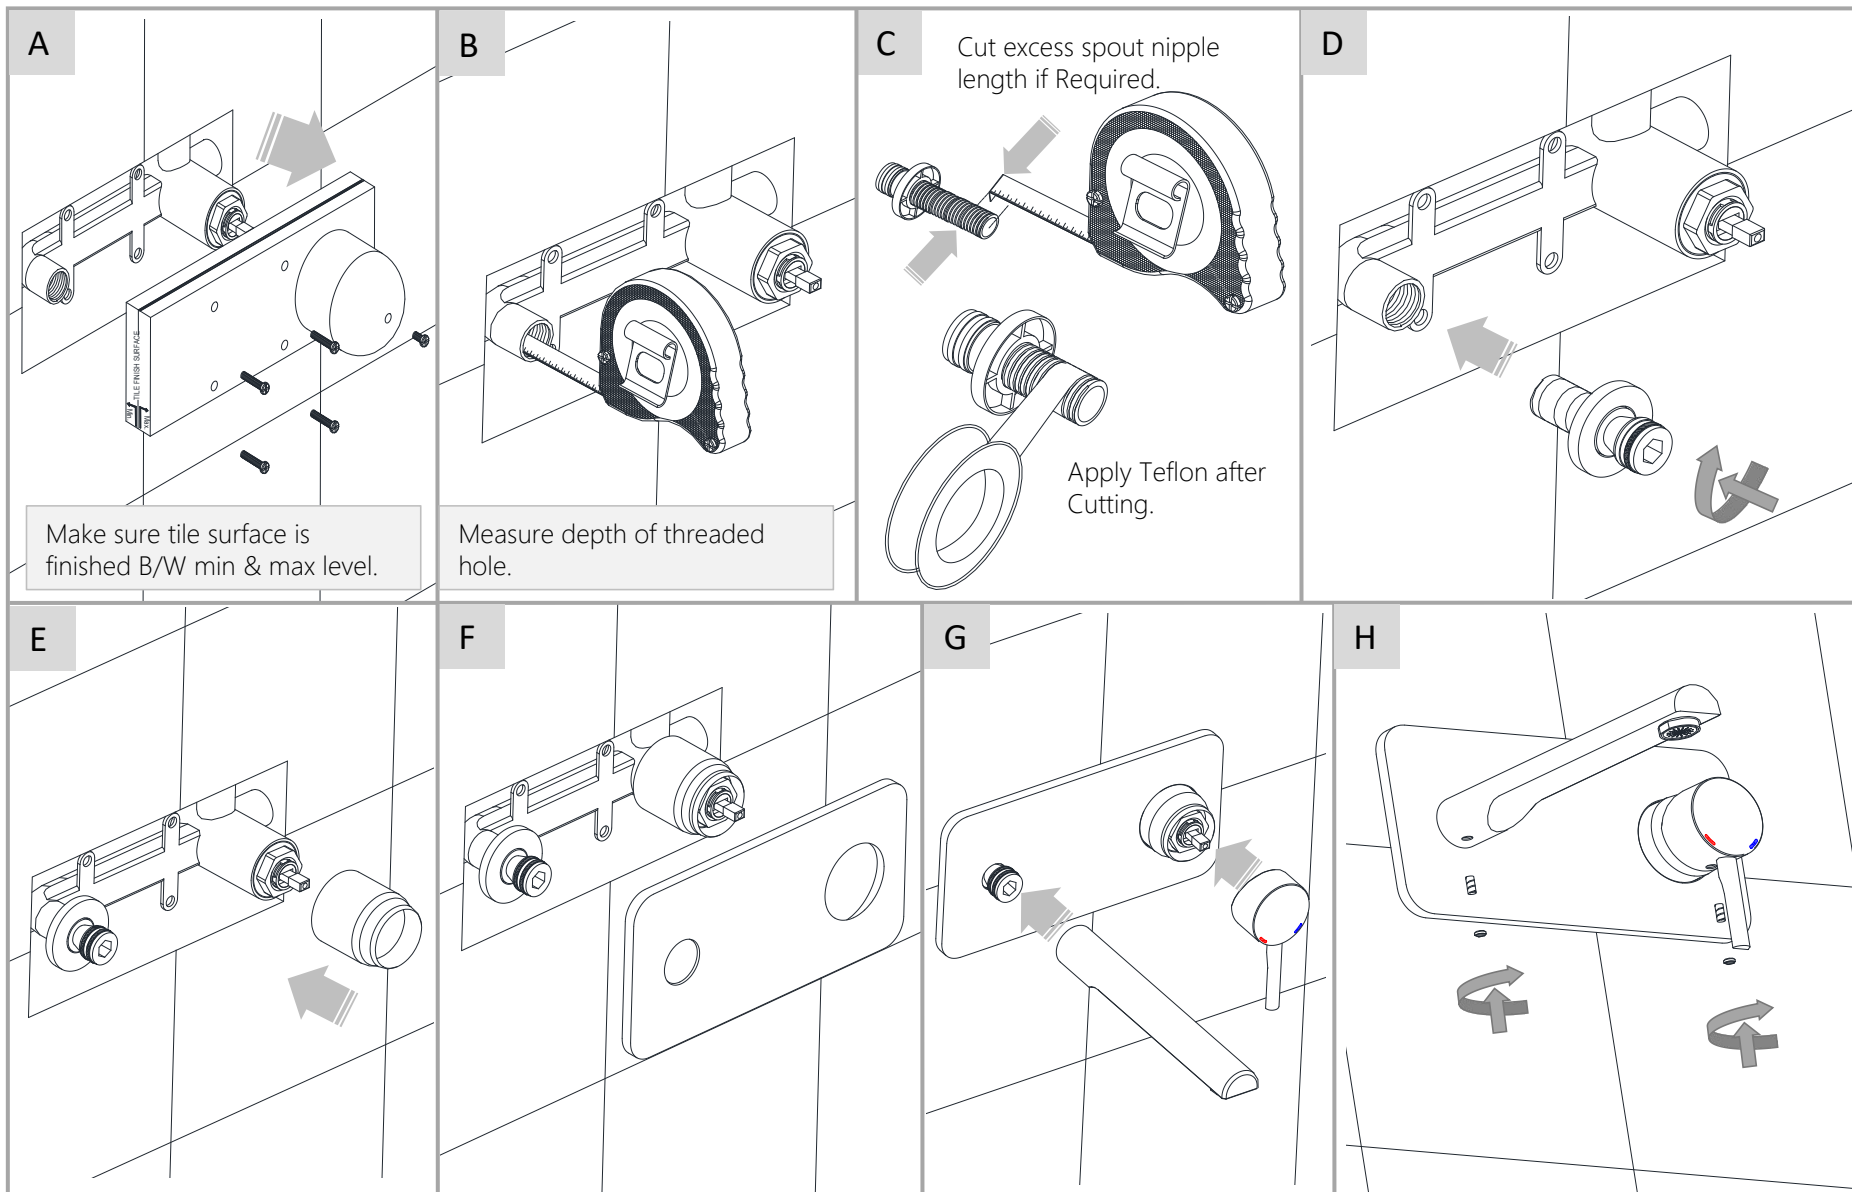


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL EXPOSED PART KIT SINGLE LEVER BASIN MIXER WALL MOUNTED.

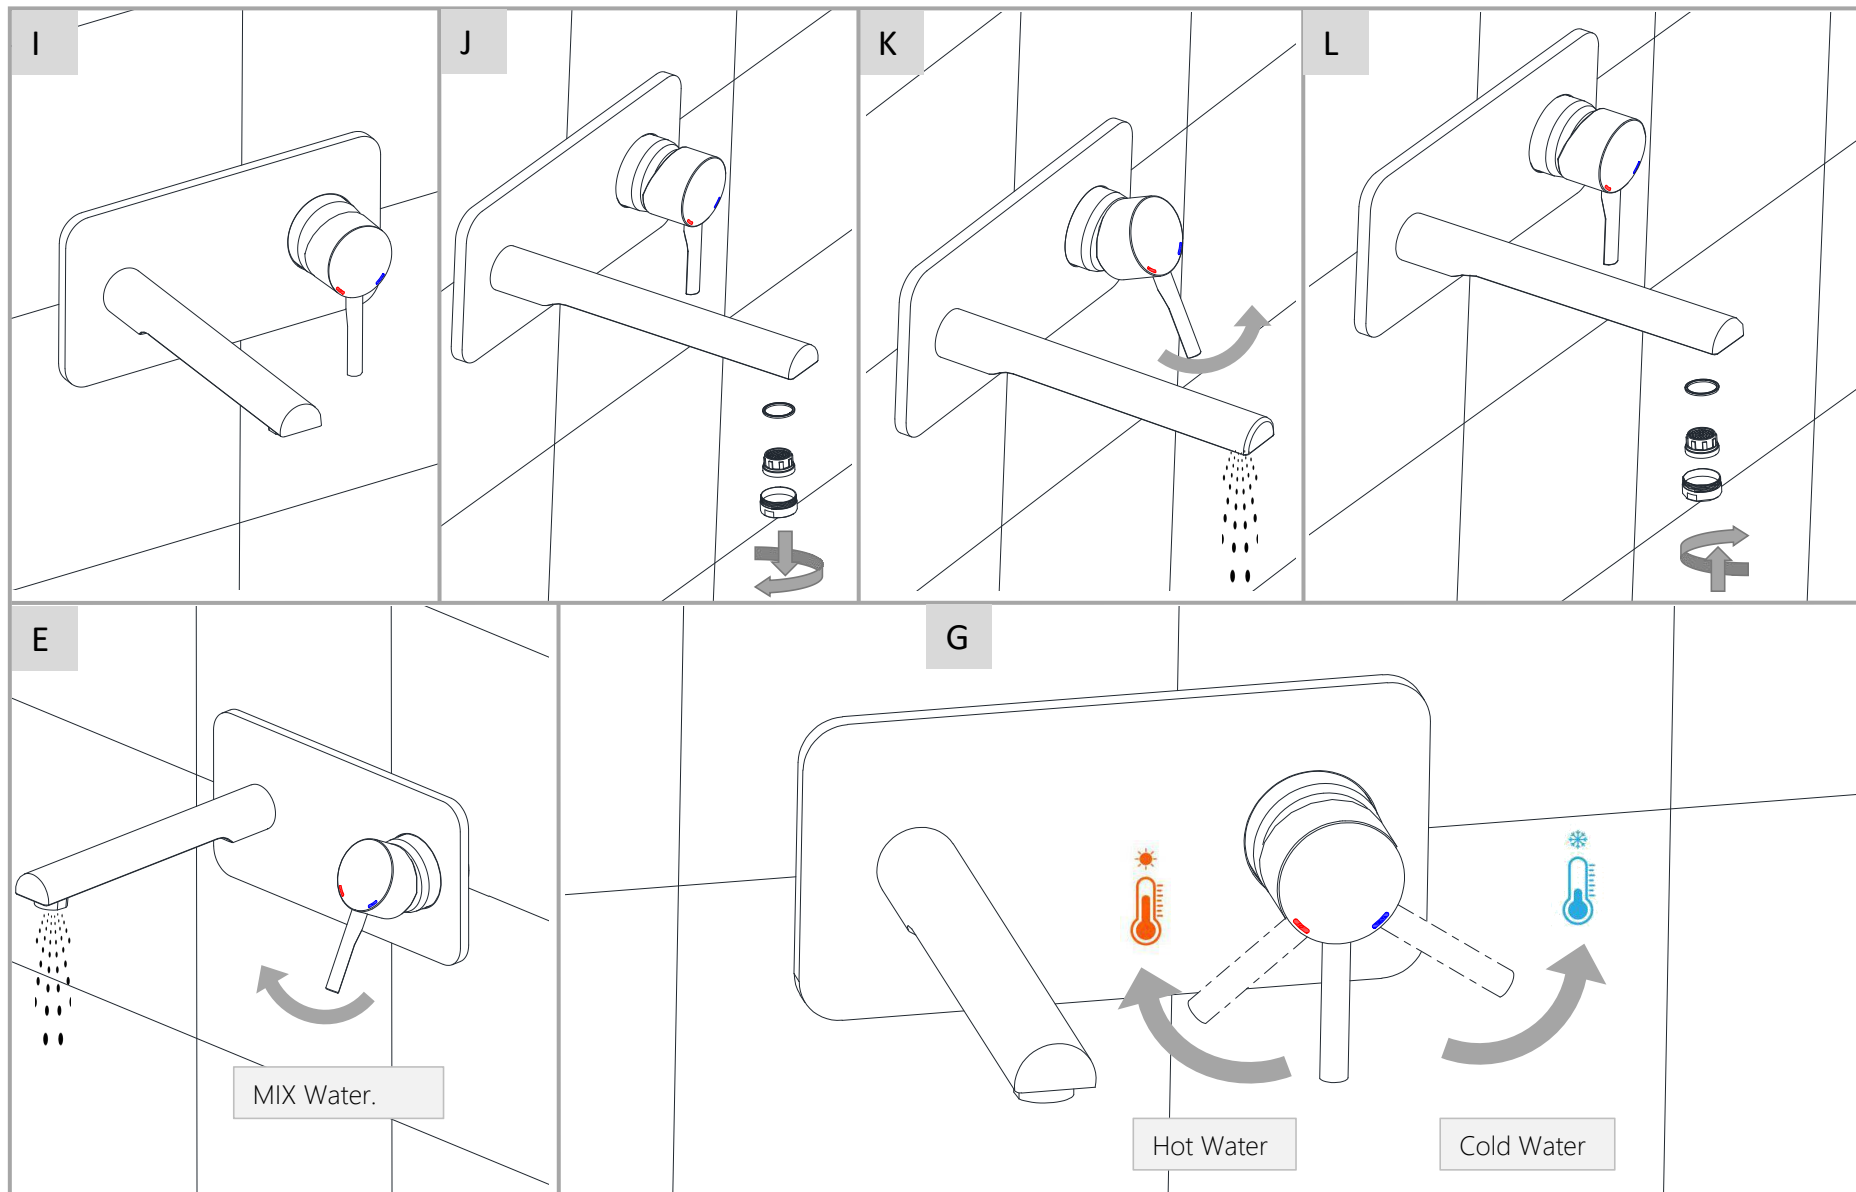

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL EXPOSED PART KIT SINGLE LEVER BASIN MIXER WALL MOUNTED.

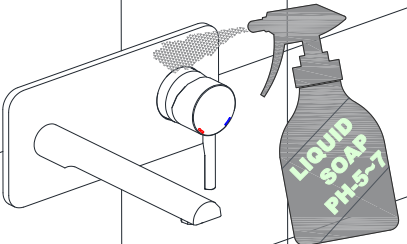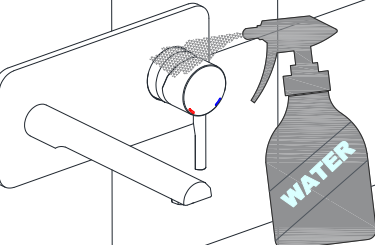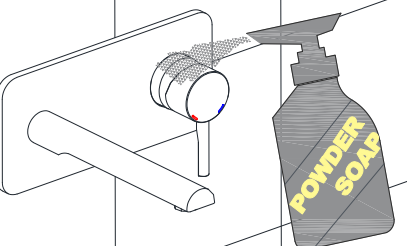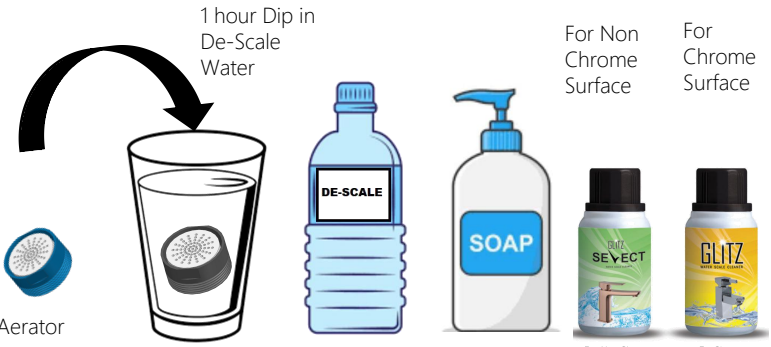

 <p>Note: Apply liquid soap pH-B/W 5~7 or Glitz .</p>	<p>Apply soft cotton cloth</p> 		<p>Apply soft cotton cloth</p> 
 <p>❌ DON'T</p>	<p>Don't apply Scrub</p>  <p>❌ DON'T</p>	<p><u>Steps & Cleaning agents requirements for Cleaning.</u></p> <div style="text-align: center;">  <p>1 hour Dip in De-Scale Water</p> <p>Aerator</p> <p>De-Scale Water</p> <p>Liquid Soap PH-5-7</p> <p>For Non Chrome Surface: SEVTECT</p> <p>For Chrome Surface: GLITZ</p> </div> <p>Recommended Cleaning:-Twice a week.</p>	

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL EXPOSED PART KIT SINGLE LEVER BASIN MIXER WALL MOUNTED.