





PRODUCT INFORMATION

Single Lever Basin Mixer with Popup Waste System

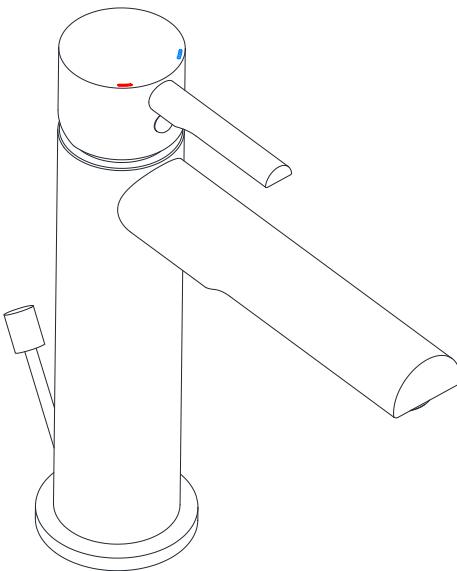

* Representative image


Temp & water pressure Requirement.

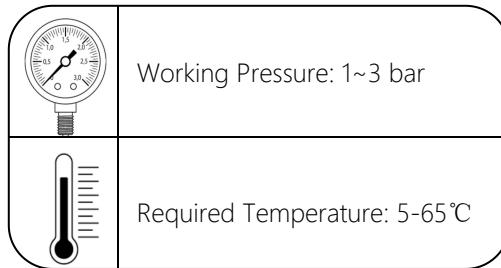


- Working Pressure**:- The water pressure should be Between 1 and 3 bar for proper functioning.
- Required Temperature**:- The water temperature within the range of 5-65° for safe & effective use.
- Note:- These are recommended values for achieving conventional /Optimum output.

Guideline for Braided hose Installation

- Keep the hose straight as much as possible.
- Don't twist or bend hose during connection.
- Make sure hose is fully tighten to avoid any leakage.

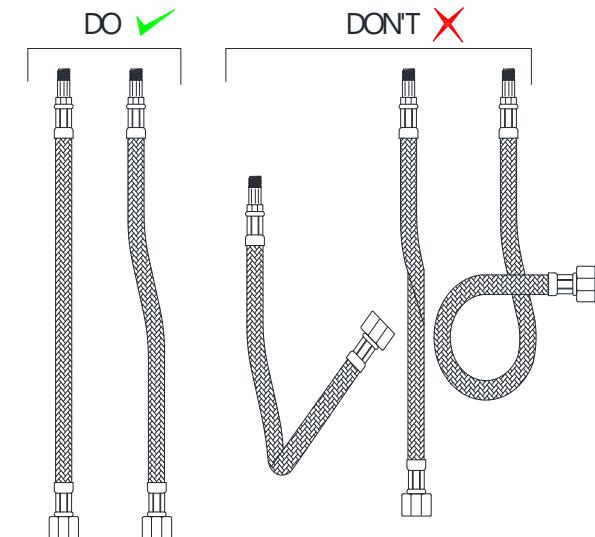


HOW TO INSTALL

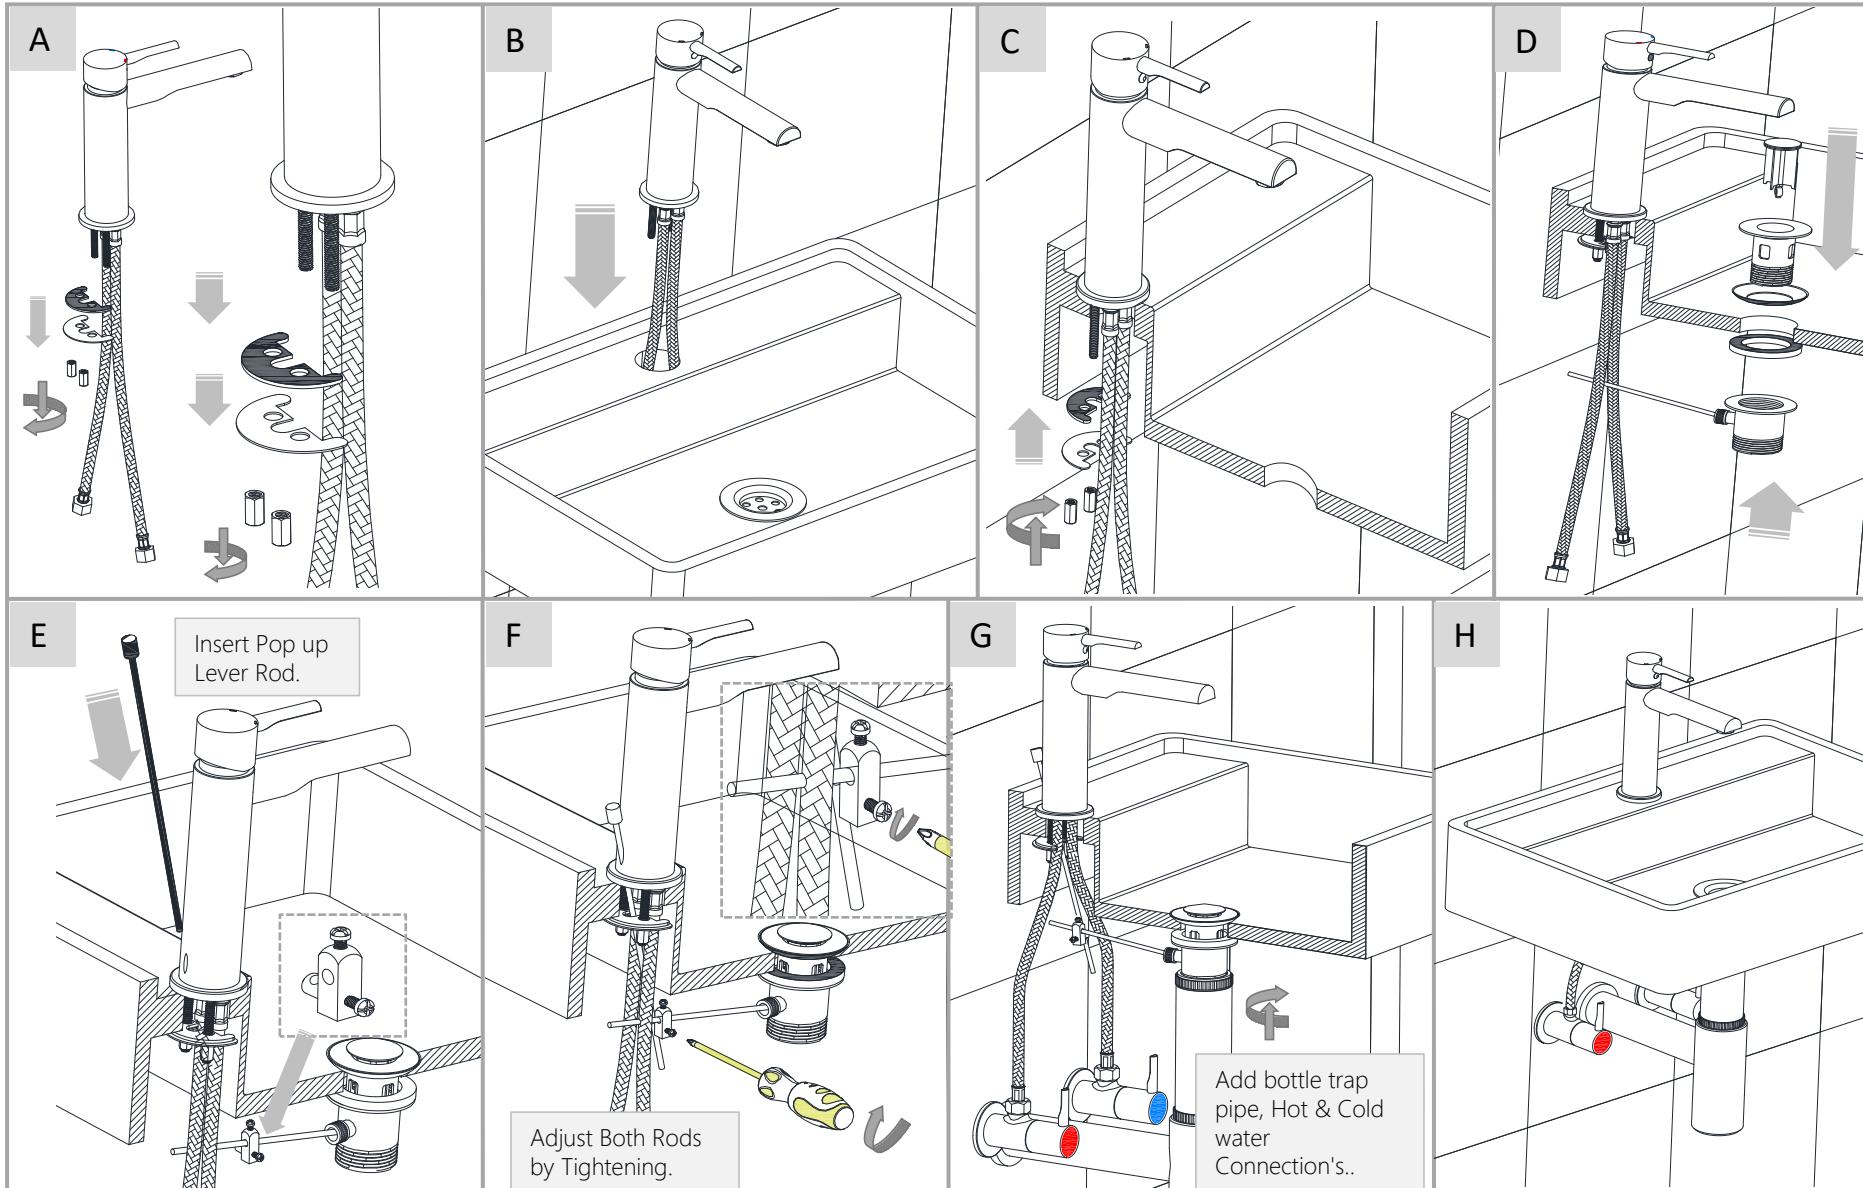






Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER BASIN MIXERS WITH POP-UP WASTE.

HOW TO INSTALL

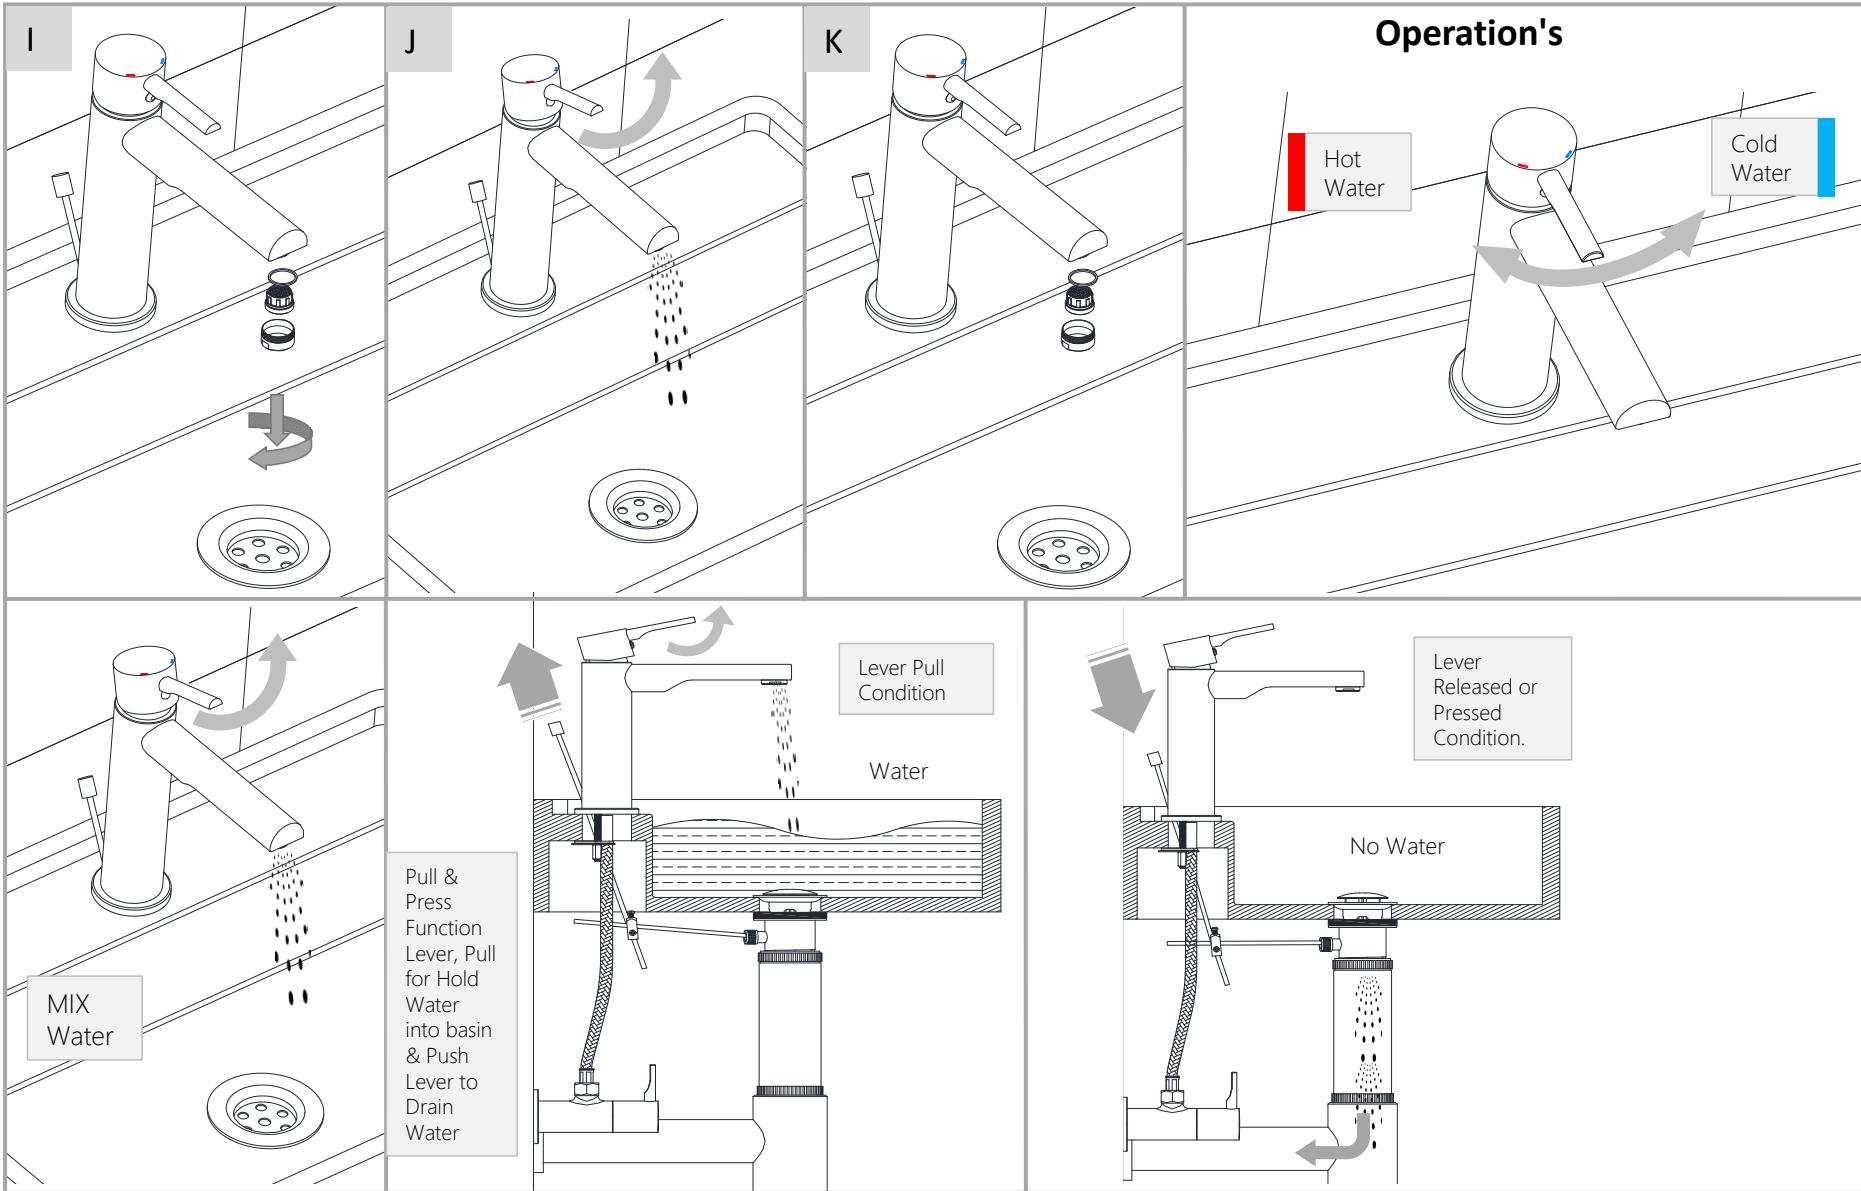

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER BASIN MIXERS WITH POP-UP WASTE.

CLEANING INSTRUCTIONS

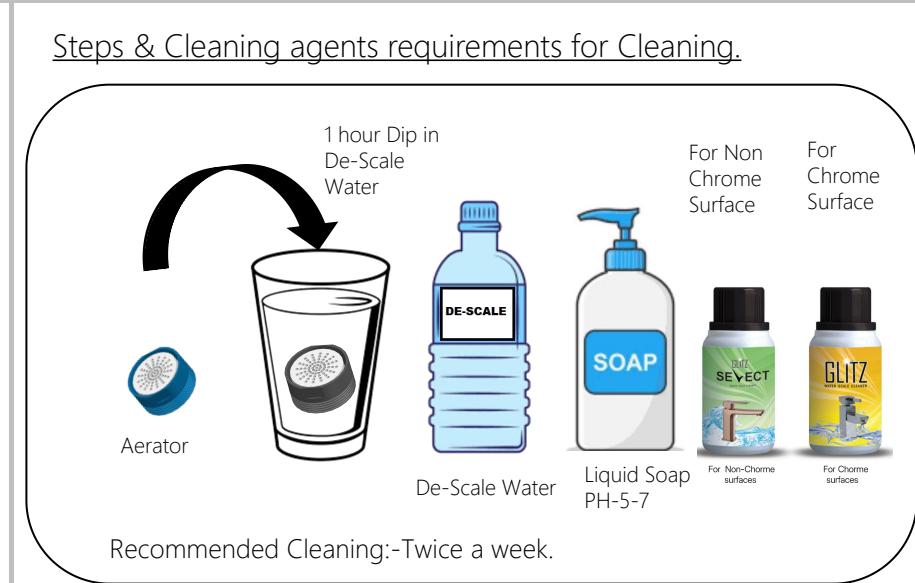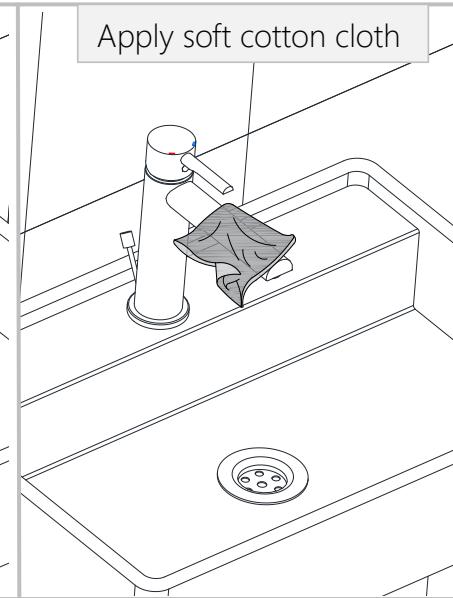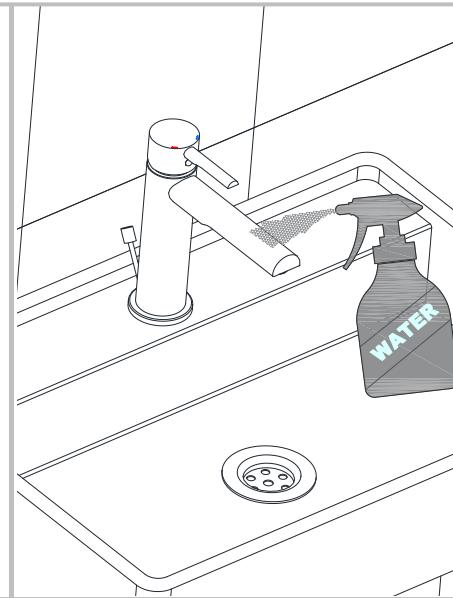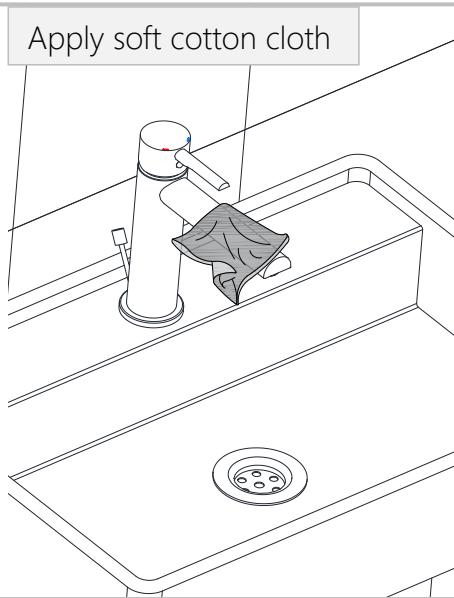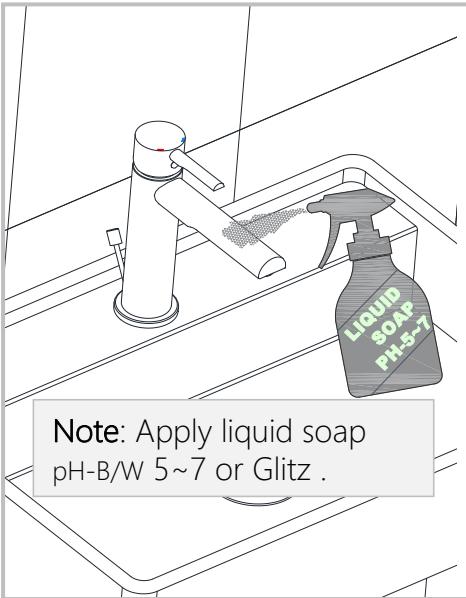

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER BASIN MIXERS WITH POP-UP WASTE.