



INSTALLATION GUIDE








Requirements:-


- ◆ Pencil for marking, Screw driver, Teflon Tape.
- ◆ Plastic gauge for gap measurement (Included in box)
- ◆ Inlet pipe connection (1085DFP) 1-1/4" BSPP (32mm) & Outlet 1-1/2" BSPP (40mm)
- ◆ Inlet & outlet pipe connection (1089DFP) 1-1/2" BSPP (40mm)

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR METROPOLE FLUSH DUAL FLOW.




*** Representative image**

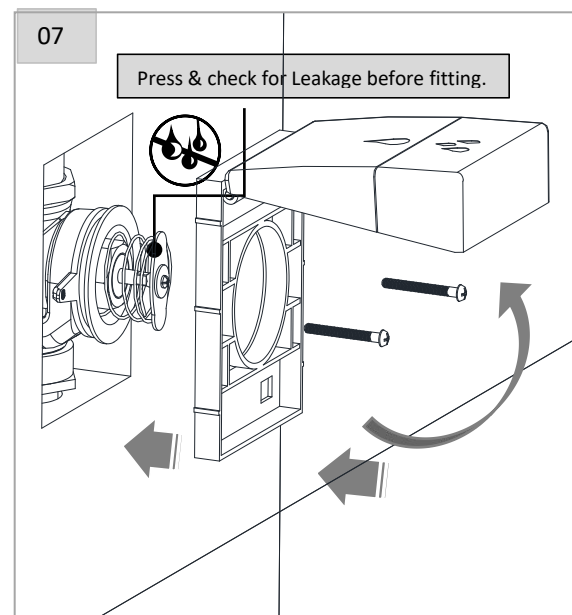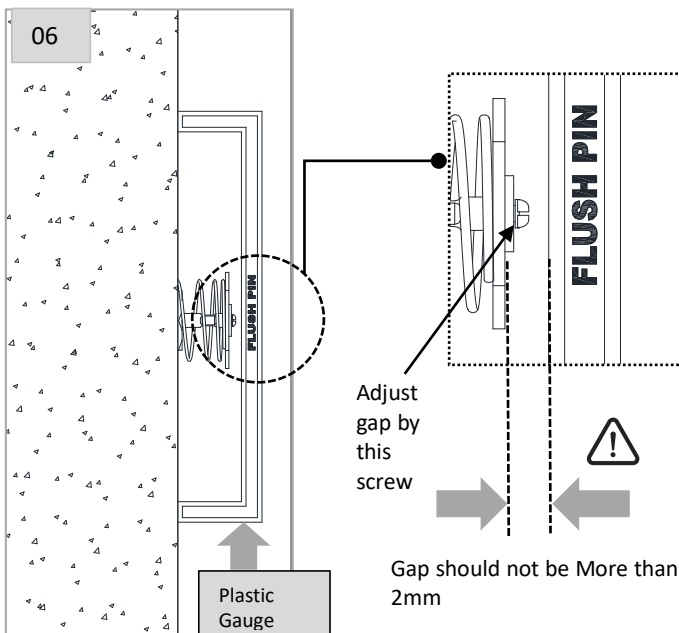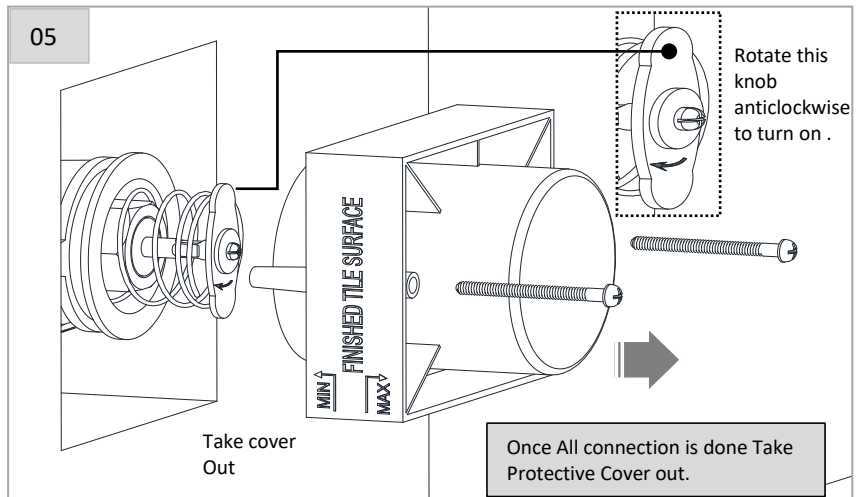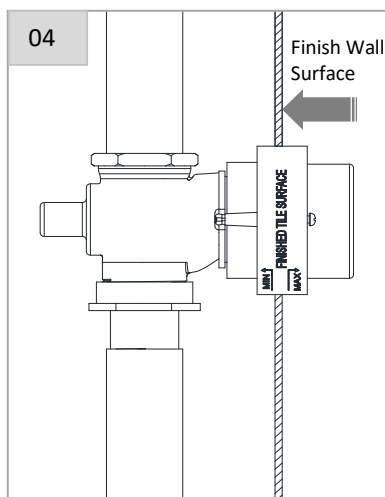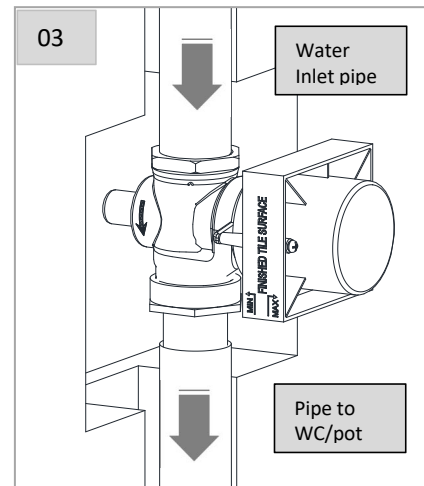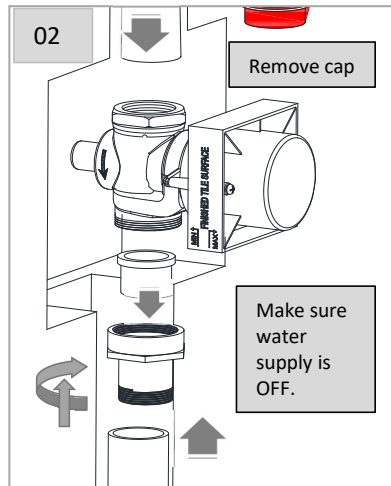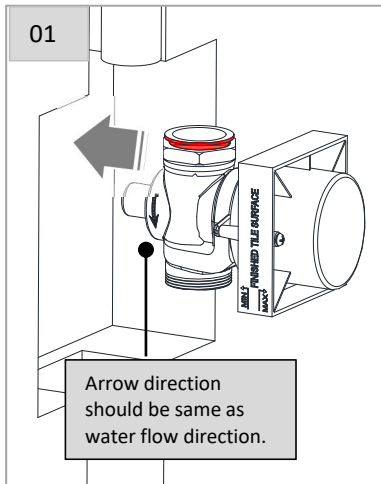

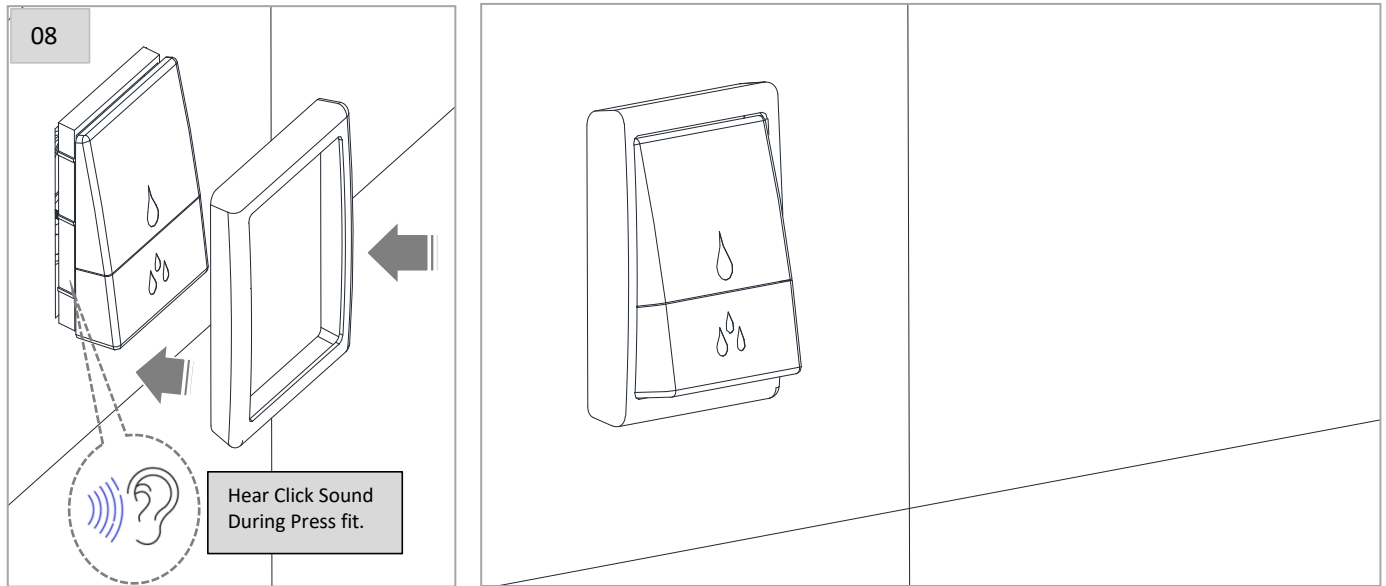

How to operate:-

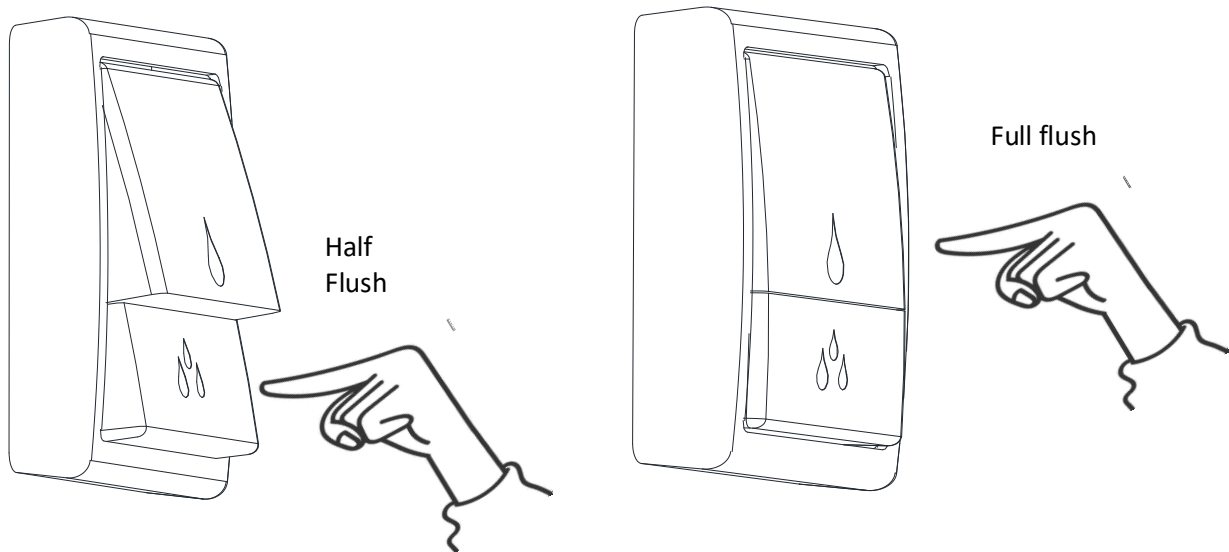

Safety Tips & Cleaning instruction.

- ❖ Make sure Valve is mounted at reachable height.
- ❖ Make sure no loose fitting, Check for Leakage before final fittings.
- ❖ Don't use any metal/hard bristle scrub while cleaning .
- ❖ Use soft water & wipe up with soft cotton cloth.
- ❖ Don't push fittings forcefully, can lead to damage or crack.

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR METROPOLE FLUSH DUAL FLOW.



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap (pH 5-7) or Glitz solution with a neutral water.

Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap.

This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting.

This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.

For Non
Chrome
Surface

For
Chrome
Surface



Recommended Cleaning:-
Twice in a Week.

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR METROPOLE FLUSH DUAL FLOW.