

KUBIK PLUS 20W

KUBIK PLUS HD BATTEN (900mm)

Indoor Luminaire

Product Code:

LKBPM4KV20XC / LKBPM4KV20XN / LKBPM4KV20XW

20W - 2000lm - 6500K - CRI>80 Ra - Beam Angle 120°



Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	220 ~ 240 VAC, 50Hz
Rated Input Wattage	20W ± 10%
Rated Input Current	0.100 Amp (Nominal)
Power Factor	≥0.90
ATHD	<15%
Rated Luminous Flux	2000 lm / 1900 lm / 1800 lm (tolerance as per BIS)
Rated Luminaire Efficacy	100 lm/W / 95 lm/W / 90 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	120° (within the permissible limits)
Driver Efficiency	>80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	PC. Housing
Lens / Reflector	PC. Diffuser
Mounting	Wall Mount

Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

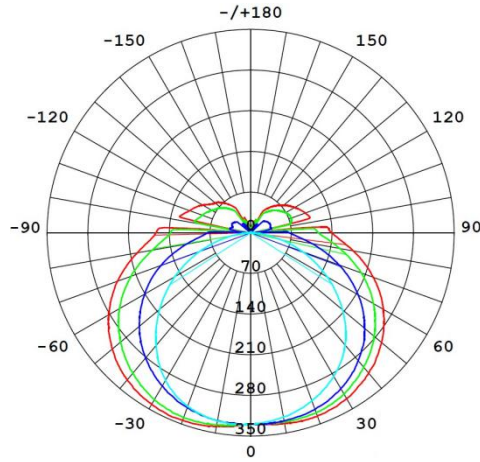


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.1	22.5	21.6	23.0	23.5	19.1	20.5	19.6	21.0	21.5
3H	23.7	25.0	24.2	25.5	26.1	20.5	21.8	21.0	22.3	22.9
4H	25.1	26.3	25.6	26.8	27.4	21.1	22.3	21.6	22.8	23.4
6H	26.5	27.7	27.1	28.3	28.9	21.4	22.6	22.0	23.1	23.7
8H	27.3	28.5	27.9	29.0	29.6	21.5	22.6	22.1	23.2	23.8
12H	28.2	29.3	28.8	29.9	30.5	21.5	22.6	22.1	23.2	23.8
4H 2H	21.7	23.0	22.3	23.5	24.1	20.3	21.6	20.9	22.1	22.7
3H	24.5	25.6	25.1	26.2	26.8	22.1	23.2	22.7	23.8	24.4
4H	26.1	27.1	26.7	27.7	28.3	22.9	23.9	23.5	24.5	25.1
6H	27.8	28.7	28.4	29.3	30.0	23.4	24.3	24.0	24.9	25.6
8H	28.7	29.5	29.3	30.2	30.9	23.6	24.4	24.2	25.0	25.8
12H	29.7	30.5	30.4	31.1	31.9	23.7	24.4	24.3	25.1	25.8
8H 4H	26.4	27.3	27.1	27.9	28.6	23.9	24.8	24.5	25.4	26.1
6H	28.4	29.1	29.1	29.8	30.5	24.9	25.6	25.5	26.3	27.0
8H	29.5	30.2	30.2	30.8	31.6	25.3	25.9	25.9	26.6	27.4
12H	30.8	31.4	31.5	32.1	32.9	25.5	26.1	26.2	26.8	27.6
12H 4H	26.5	27.3	27.1	27.9	28.6	24.2	25.0	24.8	25.6	26.4
6H	28.5	29.2	29.2	29.8	30.6	25.4	26.0	26.1	26.7	27.5
8H	29.8	30.3	30.4	31.0	31.8	26.0	26.5	26.7	27.2	28.0
Variations with the observer position at spacings (CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.4				

Product Dimensions (L x W x H)

900 X 22 X 33 mm (Tol. \pm 5 mm)

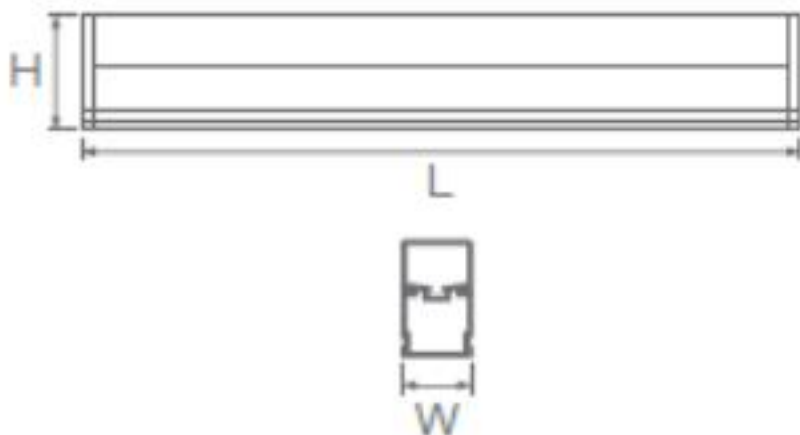

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.