

TITANO 10W


TITANO LED BOLLARD

Indoor Luminaire

Product Code:

824K075L10H.NHG

10W - 560lm - 3000K - CRI>70 Ra



Technical Specifications

| | |
|------------------------------------|--|
| Operating Temperature | -10°C to 50°C |
| Rated Input Voltage & Frequency | 240 VAC, 50Hz |
| Rated Input Wattage | 10W ± 10% |
| Rated Input Current | 0.050 Amp (Nominal) |
| Power Factor | ≥0.90 |
| ATHD | <20% |
| Rated Luminous Flux | 560 lm (tolerance as per BIS) |
| Rated Luminaire Efficacy | 56 lm/W (tolerance as per BIS) |
| Correlated Color Temperature (CCT) | 3000 K (tolerance as per ANSI) |
| Color Rendering Index (CRI) | >70 Ra |
| Driver Efficiency | ≥80% |
| LED Life Span | >50000 Hrs (Ta=25°C @L70) |
| Housing | Extruded Aluminium with Powder Coating |
| Lens / Reflector | Transparent Polycarbonate Diffuser |
| Mounting | Surface |


Protections

| | |
|-----------------------------------|------------------------------------|
| Over Voltage Protection | Withstand upto 300V/AC for 20 min. |
| Surge Protection | ±2.0KV |
| Protection Class | Class II |
| Ingress Protection (IP Rating) | IP65 |
| Impact Protection (IK Rating) | IK08 |
| Short Circuit Protection | Provided |
| Open Circuit Protection (No Load) | Provided |
| Reverse Polarity Protection | Provided |

All technical data is subject to industry-standard tolerances.

Product Dimensions (Dia.xH)

Ø145 X 750 mm (Tol.±5 mm)

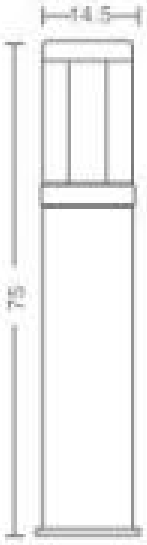

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.