





OPERATING HANDLE



SLEEVE

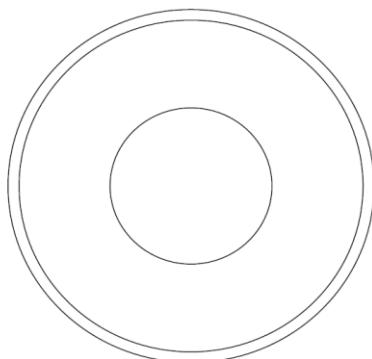

WALL FLANGE

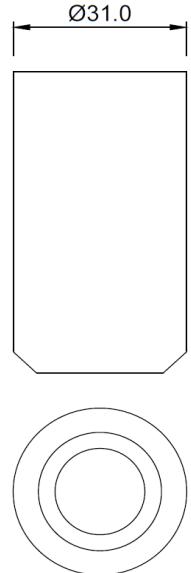

<b>Product Code</b>	COP-CHR-081NKPM
<b>Description</b>	Exposed Part Kit of Concealed Flush Cock with Fitting Sleeve, Operating Lever & Adjustable Wall Flange with Seal (compatible with ALD-081)
<b>Recommended Water Pressure</b>	0.5 Bar - 5 Bar
<b>Material Composition Specification in Percentage</b>	<b>ABS</b> - Specific Gravity (g/cm <sup>2</sup> ) - (1.06-1.10), Melt Mass Flow Rate (g/10 min.) - (20-26), Rockwell Hardness - (95-115), DTUL @ 66 psi (0.45 MPa) (0C) - (78-102) <b>Zamak-3</b> Cu (0.25 Max), Al (3.5 - 4.3), Mg (0.02 - 0.05), Zn (Remainder)
<b>Finish</b>	Plating: Nickel-10.0 micron Chromium-0.3 micron Salt Spray (500 hrs + Validated) Adhesion (Pass)
<b>Available Colour Finishing</b>	CHROME (CHR)

**DISCLAIMER:** Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. Jaquar reserves the right to make the necessary amendments at any time without prior notice.